


# Gooseneck

## Operation and Maintenance Guide

**Better – Faster – Every time**

### Model: 85T

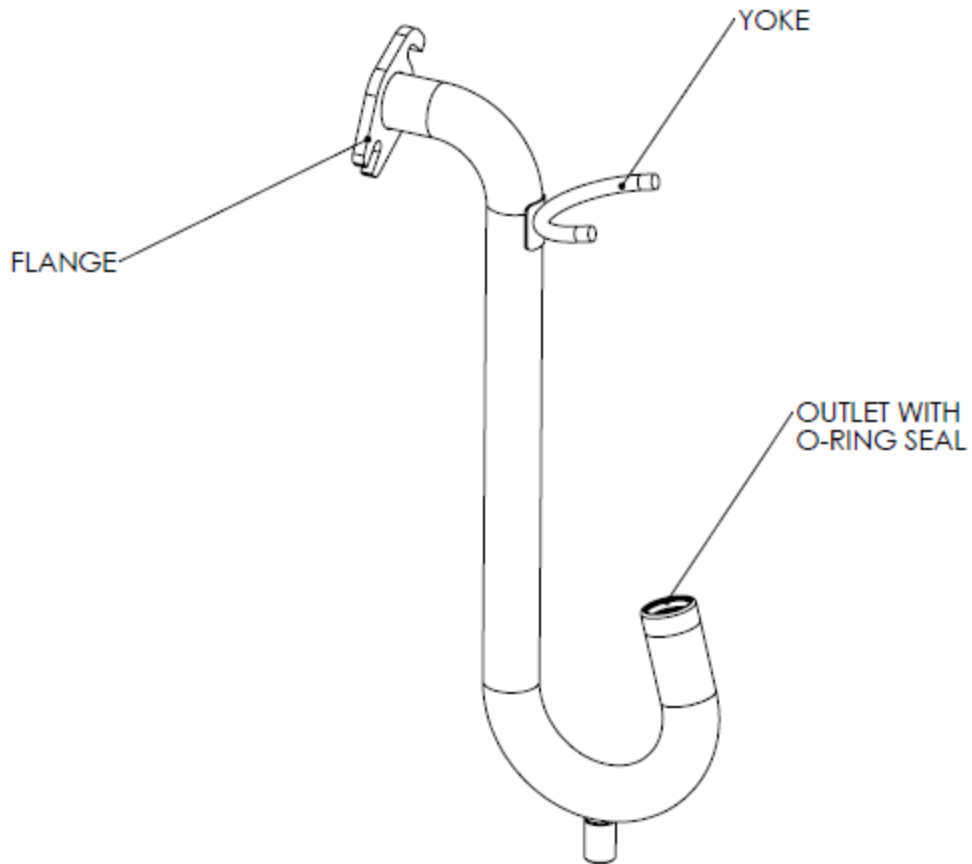

# Gooseneck

## Operation and Maintenance Guide

### **Better – Faster – Every time**

### **Operation**

The gooseneck is attached to the EasyClean® Pump and is used to fill the automatic taper. Place the EasyClean® Pump gasket (#700049) on the EasyClean® Pump housing, over the protruding studs. Then, set the gooseneck over the studs and tighten the hex nuts firmly to prevent leakage.

### **Maintenance**

Remove the gooseneck from the EasyClean® Pump and clean thoroughly with a brush and water (or a water hose) to remove all joint compound from the tool. Then, after the tool is clean, lightly oil with Ames® Bazooka® Oil or any light machine oil.

